

GP1800

GP SERIES
Commercial/Residential
Portable Generators

Features


- **The Generac OHV engine** incorporates splash lubrication and provides long life.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Hardened steel tube cradle** for added strength and durability.

Model 5981-2 UPC: 696471059816 EPA/49-State/CSA



AC Rated Output Running Watts 1800
AC Maximum Output Starting Watts 2050

49-State/CSA Control Panel

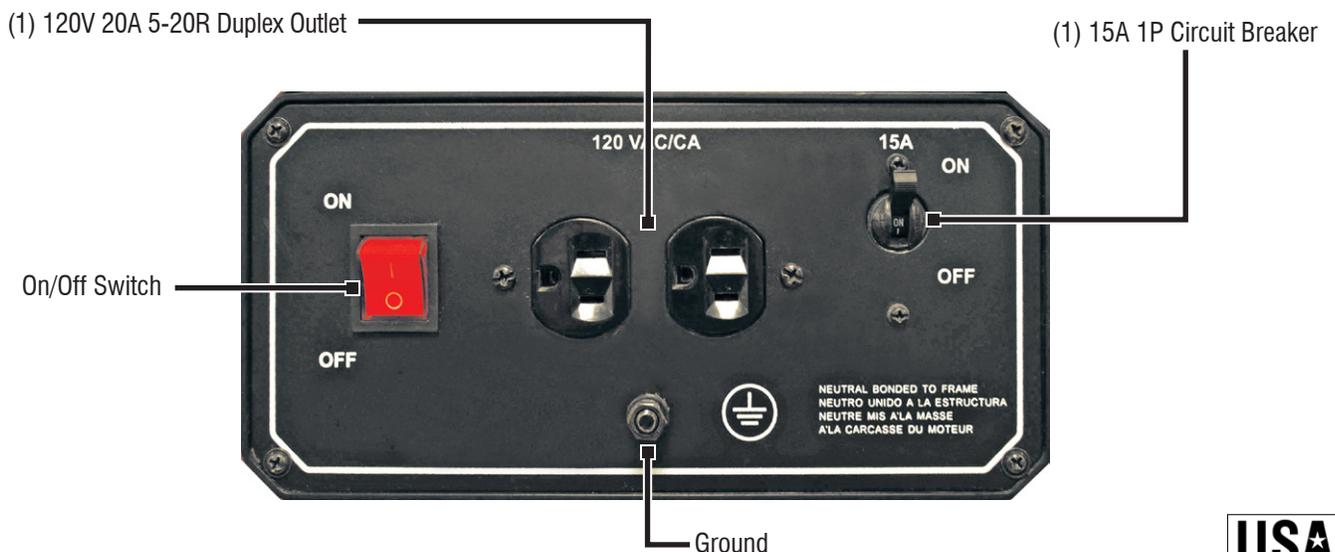

GP1800

Specifications

Product Series	GP1800
Model	5981-2
Configuration/Emissions	EPA/49-State/CSA
AC Rated Output Running Watts:	1800
AC Maximum Output Motor Starting Watts:	2050
AC Voltage	120VAC
AC Frequency	60 Hz
Rated VAC Amperage	15
Max Rated VAC Amperage	17.08
Engine Displacement	163cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Fuel Tank
Starting Method	Recoil Pull Start
Low Oil Shutdown Method	Low Level
Neutral Bonded to Ground	Yes

Start Switch Type	On/Off Switch
Switch Location	On Control Panel
Fuel Gauge	Built-In Tank
Fuel Tank Capacity Gal (Ltrs)	3.5 (13.3)
Run Time at 50% (Hours)	10.5
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year Ltd
Warranty - Commercial	1 Year Ltd

Dimensions and Weights

Length in (mm)	22.75 (580)
Width in (mm)	16.75 (430)
Height in (mm)	17.25 (438)
Carton Length in (mm)	23.25 (590)
Carton Width in (mm)	17.25 (440)
Carton Height in (mm)	17.75 (453)
Unit Weight lbs (kg)	84 (38)
Shipping Weight lbs (kg)	88 (40)

